




Dexion (Australia) Pty Limited. ABN 83 000 083 956. Head Office: 23 Tattersall Road, Kings Park NSW 2148. dexion.com.au
Dexion New Zealand. Incorp No. 1856839. Head Office: 423 East Tamaki Road, East Tamaki, Auckland 2013. dexion.co.nz

Whilst the utmost care is taken to ensure the accuracy of the information contained herein, it is provided in the understanding that the company shall under no circumstances be liable for any injuries, expenses or other losses which may in any way be attributable to the use or adoption of such data and/or design details. All dimensions indicated are nominal only. Dexion reserves the right to alter or amend without prior notice data and design details specified herein. Product specifications may vary between regions. Re-Order Code M085. F+S+A/DEX0072

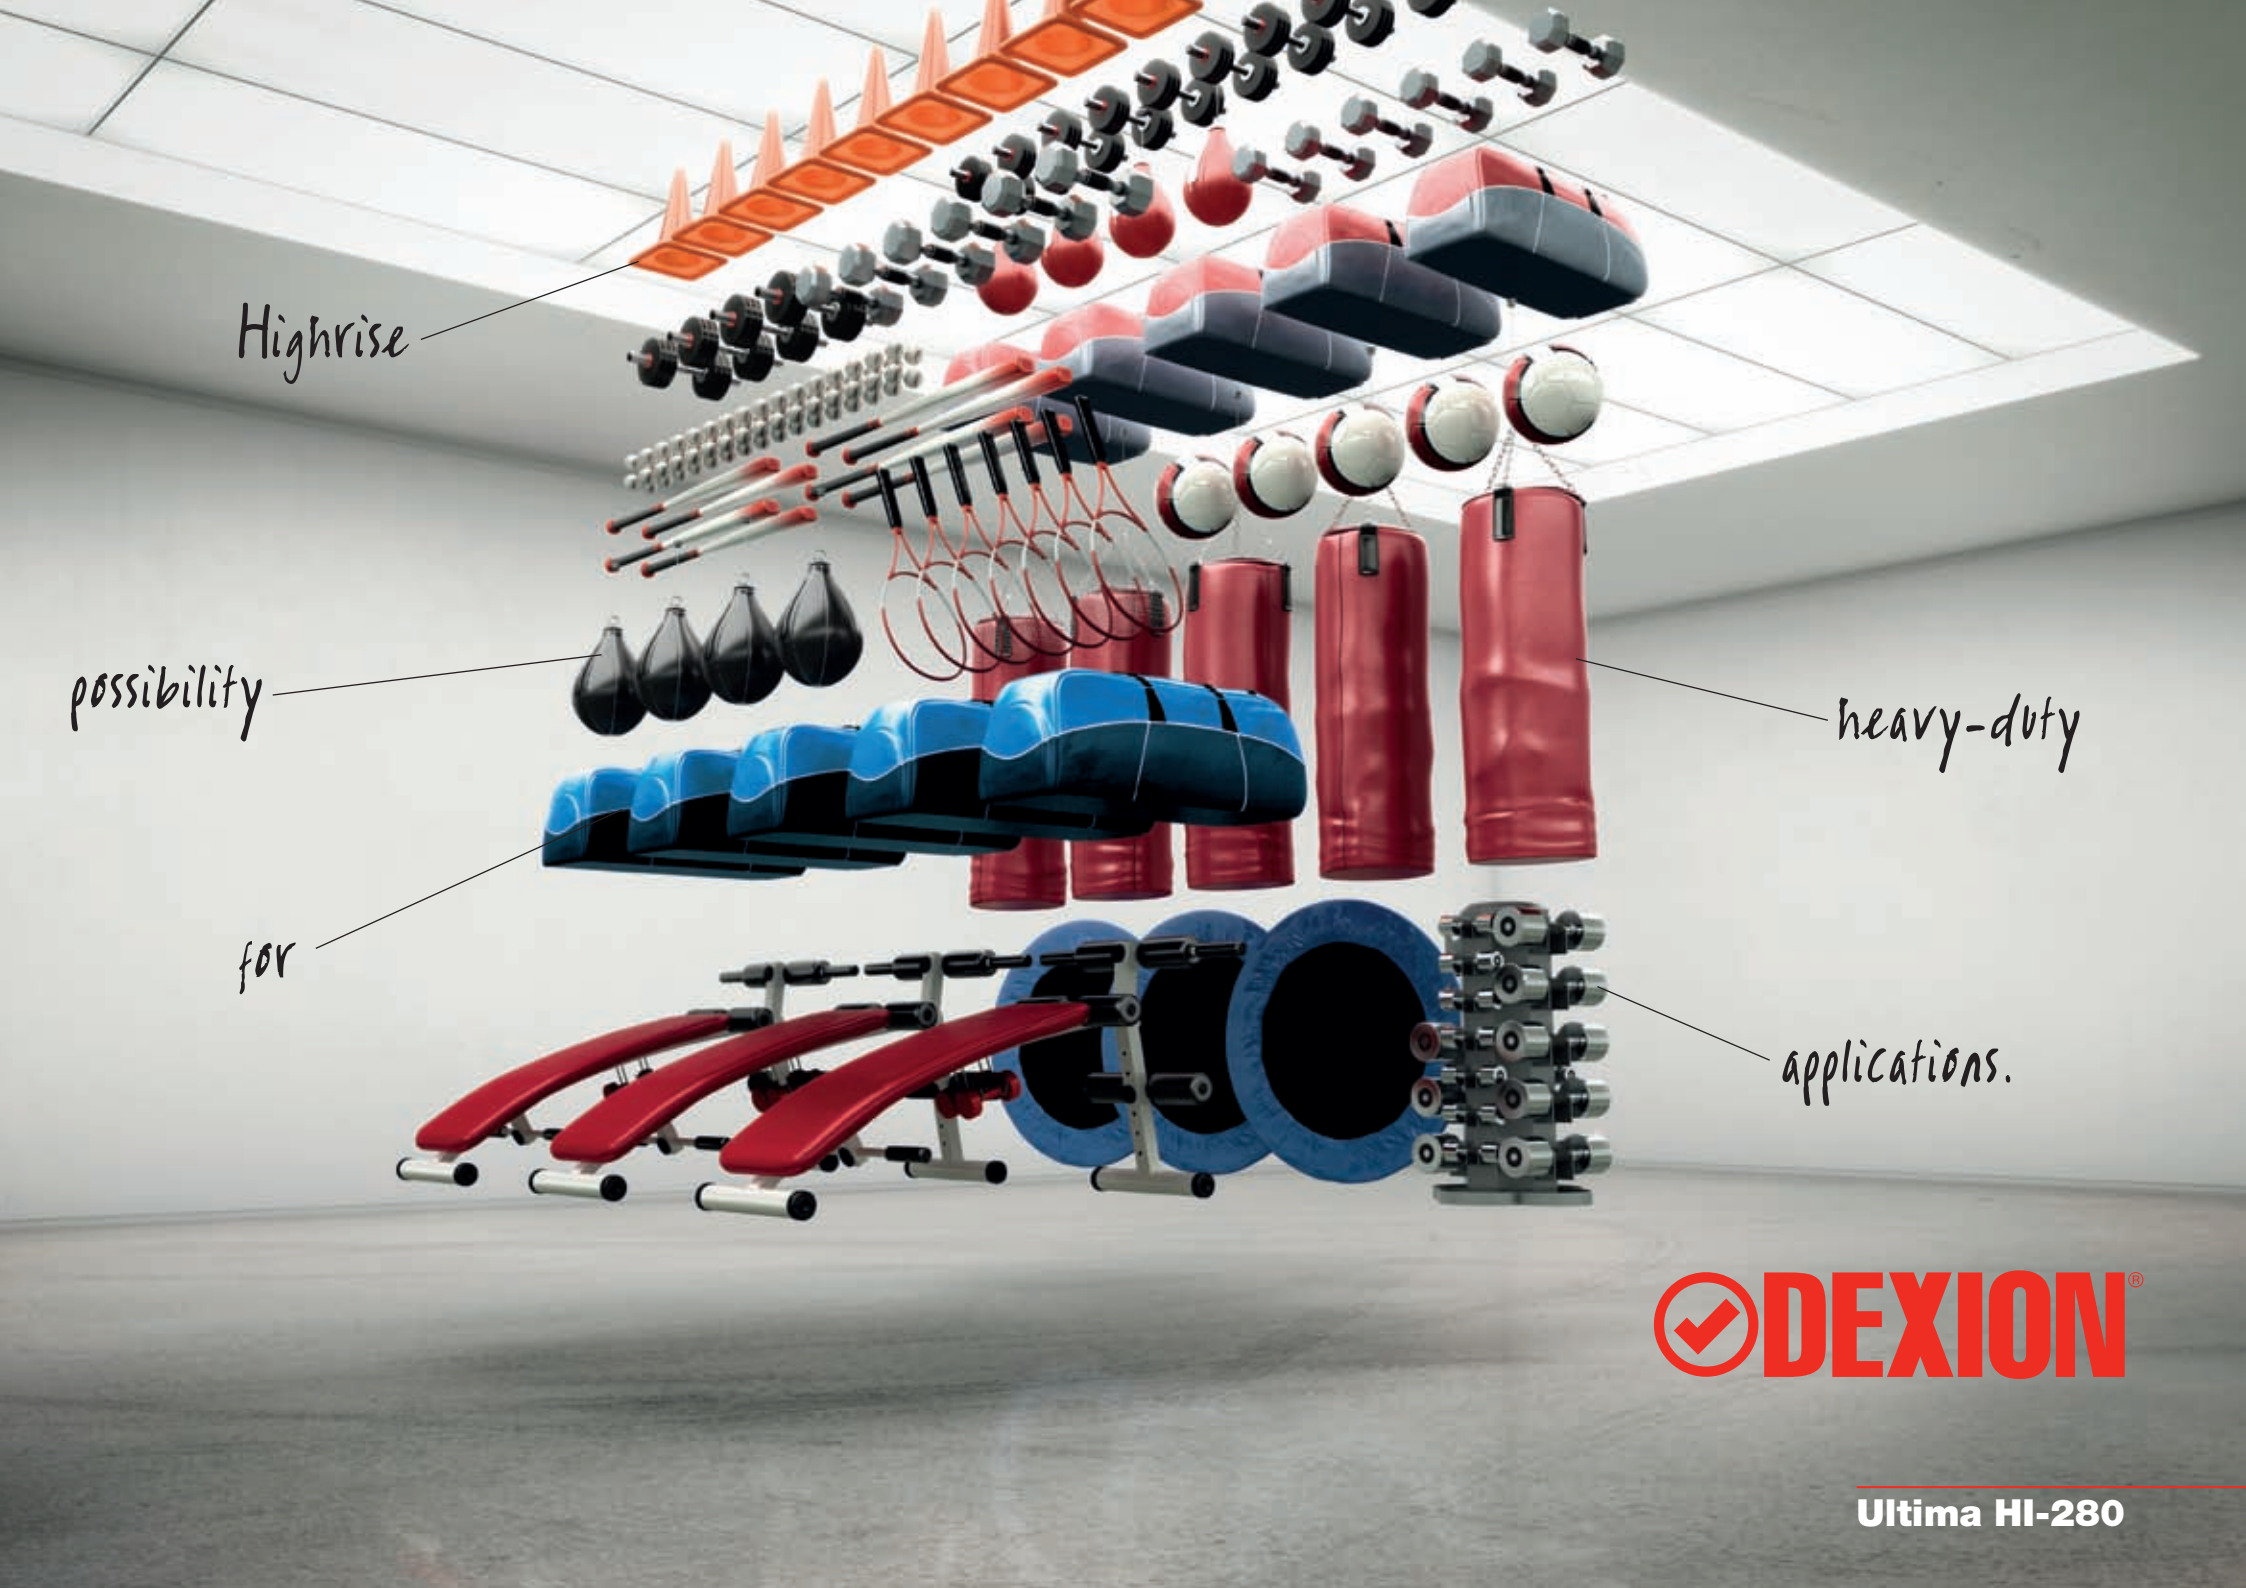

Ultima HI-280



From little to large.

Ultima HI-280.

You need:

A solution for demanding items or those that require specialised storage. Flexibility is also important, with the ability to expand in the future.

Our solution:

Ultima HI-280 is the solution for items other systems can't handle. It's big on carrying capacity and shelving bay lengths and height. What's more, it's completely boltless and nutless: components slot together to create fast and rigid structures. Ultima HI-280 can be used for everything from high-density, small parts storage through to large scale, multi-tier structures incorporating bridges, loading gates and staircases. It can even be mounted on Compactus® mobile bases.

The vital statistics:

Shelf carrying capacity up to 380kg UDL

Shelving bay carrying capacity up to 4574kg

Shelving bay lengths up to 2500mm


Shelving bay clear depths up to 1000mm

Shelving bay heights up to 12000mm

Shelf height 31mm

Beam height 70mm

Shelf or Beam pitch 25mm

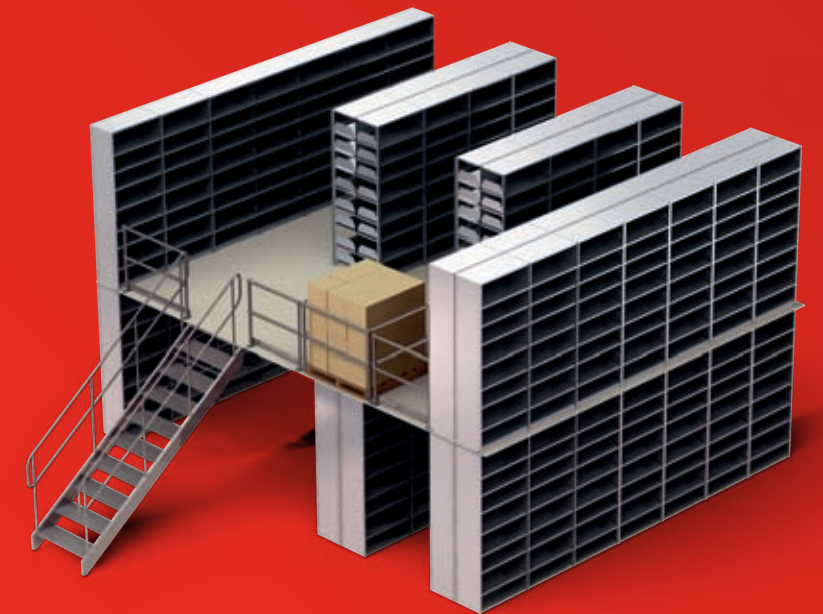



Ready for take off.

The nut, bolt
and rivet are
now redundant.



Components slot
together forming
a rigid, durable
structure that is
quick and easy to
assemble, rearrange
or dismantle for
relocation.



With no nuts, bolts,
or rivets, the system
slots together easily.
The HI-280 system
can be customised to
add any features
you need for your
particular business
needs. This flexibility
means your HI-280
system can be
configured to suit any
new directions your
business may take.



Short routes mean
better goods flow.

Myriad
utility.



HI-280 facilitates
efficient picking of
small parts.



Walkways can be
incorporated into
your system.



Multi-tier HI-280
system.




Film storage.



Tyre storage.

*Tailor your system
with accessories.*

Ultima HI-280
accessories
& specifications.

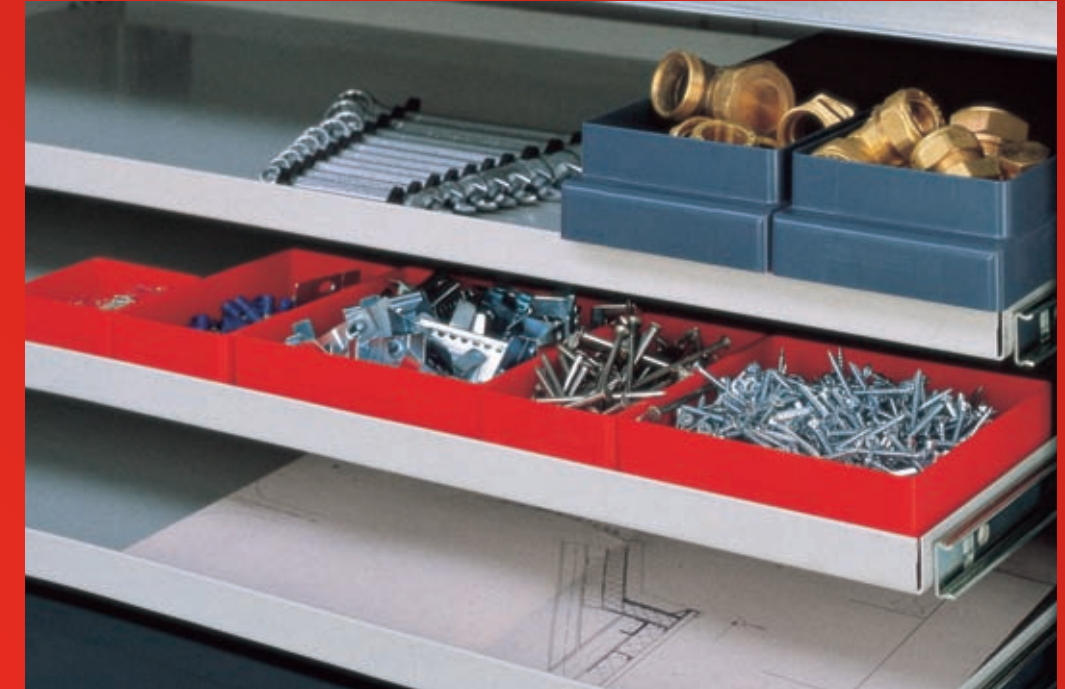

**Pull out shelves
make a great working
surface.**



**Retractable peg
board for high density
storage of small
parts.**



**Accessory
compartments and
drawers can also
be added. Great for
high density storage
of small parts.**



The height of safety.



Body work storage.



Windscreen storage.



Shelf dividers.



Bin fronts secure items within shelving unit.



Muffler storage.



Special beams allow the storing of large goods in an economical way, saving the costs of additional shelves.



Space dividers for vertical storing allow quick and direct access to long goods like tubes.

Specifications.

Specifications		Dimensions
Shelf carrying capacity		Up to 380kg
Shelving bay carrying capacity		Up to 4574kg
Shelving bay lengths		900mm, 1000mm, 1290mm, 1500mm, 1750mm, 2000mm, 2250mm, 2500mm
Shelving bay clear depths		300mm, 400mm, 450mm, 500mm, 600mm, 800mm, 1000mm
Shelving bay heights	Low rise	1000mm, 1600mm, 2100mm, 2300mm, 2500mm, 3000mm
	High rise	3100mm to 12000mm in 100mm increments.
Shelf height		31mm
Beam height		70mm
Shelf or beam pitch		25mm